


# DTi-Ti's

## Low Profile Cable Ties

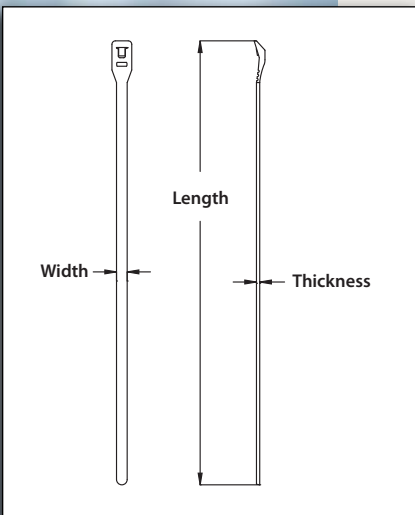

The tamper-proof Low Profile Cable Tie has a low profile head preventing snagging when the cable is trimmed and pulled through a hole. The low profile design eliminates sharp edges, common in most cable ties.

### Features and Benefits:

- Fast and easy assembly
- Indoor and outdoor use
- UV (ultraviolet) light resistance
- Flame retardant per UL92 V-2
- RoHS compliant
- Operating temperature range: -40°F to 185°F (-40°F to 85°F)
- Mil Spec approved MS3367
- Color: Black or natural

### Applications:

- Cell towers
- Aerial support
- Telecommunications
- Transportation


| DTi P/N         | Length inch (mm) | Width inch (mm) | Thickness inch (mm) | Tie Tensile lbs. | Bundle Diameter inch | Mil-Spec Reference |
|-----------------|------------------|-----------------|---------------------|------------------|----------------------|--------------------|
| 0500-05009-075M | 7.5 (190.5)      | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 1.75                 | MS3367-23-9        |
| 0500-05009-075C | 7.5 (190.5)      | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 1.75                 | MS3367-23-9        |
| 0500-05000-075M | 7.5 (190.5)      | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 1.75                 | MS3367-23-0        |
| 0500-05000-075C | 7.5 (190.5)      | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 1.75                 | MS3367-23-0        |
| 0500-05009-113C | 11.3 (288.2)     | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 3.06                 |                    |
| 0500-05000-113C | 11.3 (288.2)     | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 3.06                 |                    |
| 0500-05009-146C | 14.6 (372.1)     | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 4.06                 |                    |
| 0500-05000-146C | 14.6 (372.1)     | 0.177 (4.495)   | 0.053 (1.346)       | 50               | 4.06                 |                    |

**Tolerances:** .xxx = ±0.005, .xx = ±0.015


**Packaging:** Sealed poly bag in quantities of 100, 1000, or customer specified up to 1000 pieces

**Color Codes:** Black (00) and Natural (09)

### DTi-Ti Low Profile Cable Ties

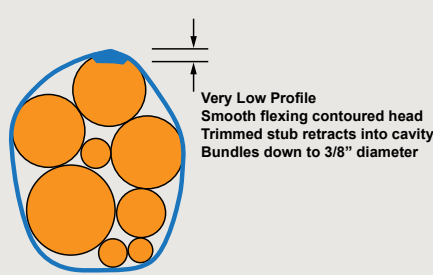

### Standard



I.S. EN ISO 9001:2008 • AS9100-B/ISO 9001:2008 Certified. Registration No. AS19.4480  
 Certified Vendor to Fortune 100 & 500 OEMs, JIT w/ MAJOR OEMs Worldwide, supported by International Distribution



[www.devicetech.com](http://www.devicetech.com)

USA Toll Free: +1-800-669-9682

Phone: +1-508-229-2000 x 130

Fax: +1-508-229-2622

Email: [customerservice@devicetech.com](mailto:customerservice@devicetech.com)

